

BIODEGRADABLE, CHEMICAL RESISTANT, SINGLE USE GLOVE

100% biodegradable nitrile single use glove with Eco Best Technology®. Provides comfort, dexterity and protection from chemicals.

FEATURES

- › 100% nitrile single use glove with a smooth grip
- › Engineered with Eco Best Technology®, making the glove biodegradable in biologically active landfills and within 1-5 years
- › Powder free with a second-skin fit and feel for comfort and dexterity
- › Significantly stronger alternative to latex
- › Silicone free
- › Finger textured finish
- › Latex free - ideal for people with a Type I latex sensitivity
- › Antistatic properties: surface resistivity between 10^9 and $10^{10} \Omega$
- › AQL 1.5 / Force at break: 6N
- › Thickness: 0.10mm (4mil), Length: 240mm (9.5inches)



Eco Best Technology

Showa's Eco Best Technology (EBT) is composed of organic material that accelerates the biodegradation of nitrile in biologically active landfills without any sacrifice in performance



SUITABLE FOR


Typical Industries

- Aerospace
- Electronics
- Food
- Pharmaceutical
- Printing

Suitable Applications

- Food Handling
- Handling Intricate Parts
- Spray Painting
- Tattooing

CERTIFICATION

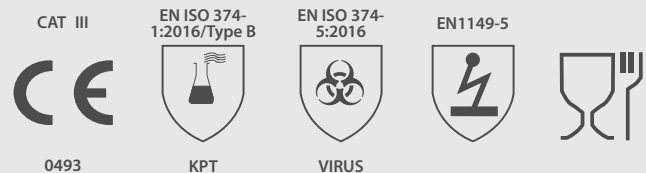

See overleaf for explanation

PRODUCT INFORMATION

MATERIALS	Nitrile with EBT®
COLOUR	Black
LENGTH (mm)	240
CUFF STYLE	Beaded

ORDERING DETAILS

SIZE	CODE	PACKAGING
6-7/S	SHO61121	100 singles per box 10 boxes per case
7-8/M	SHO61122	
8-9/L	SHO61123	
9-10/XL	SHO61124	
10-11/XXL	SHO61125	


RECOMMENDATIONS FOR USE

- USE: Single use glove. Not suitable for thermal, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

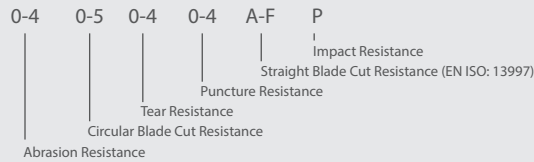

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



FOOD CONTACT DIRECTIVE 2002 / 72 EC



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid		
F	Toluene	O	25% Ammonium hydroxide	C	≥10 min for at least 1 chemical
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

