


### Product:

MX BZP Fine Thread Drywall Screws with self drilling point to penetrate wall/ceiling track systems with a maximum thickness of 2.5mm. Made from C10-18 steel.

### Features:

- Twin thread.
- PH2 drive.
- No2 drill point.
- Bugle head.
- Full threaded up to 50mm.
- Zinc plated to withstand 60 hours salt spray test in accordance with ASTM B117-11.
- Hardened durable steel.



Phillips



Plasterboard



Thin Metal

### Product range:


| Product Code | Size (mm) | Box Qty | Carton Qty (Box) |
|--------------|-----------|---------|------------------|
| 07357        | 3.5 x 32  | 1,000   | 12               |
| 07358        | 3.5 x 38  | 1,000   | 12               |
| 07359        | 3.5 x 42  | 1,000   | 12               |
| 07360        | 3.5 x 50  | 1,000   | 9                |

### Dimensions:

| Product code | Head Diameter (mm) | Screw Length (mm) | Core Diameter (mm) | Shank Diameter (mm) | Thread Lead (mm) | Drill Point Length (mm) | Max. Drill Thickness (mm) |
|--------------|--------------------|-------------------|--------------------|---------------------|------------------|-------------------------|---------------------------|
| 07357        | 8.00               | 32.0              | 2.75               | 3.5                 | 28.0             | 3.57                    | 2.50                      |
| 07358        | 8.00               | 38.0              | 2.75               | 3.5                 | 34.0             | 3.57                    | 2.50                      |
| 07359        | 8.00               | 42.0              | 2.75               | 3.5                 | 38.0             | 3.57                    | 2.50                      |
| 07360        | 8.00               | 50.0              | 2.75               | 3.5                 | 46.0             | 3.57                    | 2.50                      |

### Installation guidelines:

In order to guarantee a secure fixing, the screw must fully penetrate through the back of the steel by a minimum of 10mm.

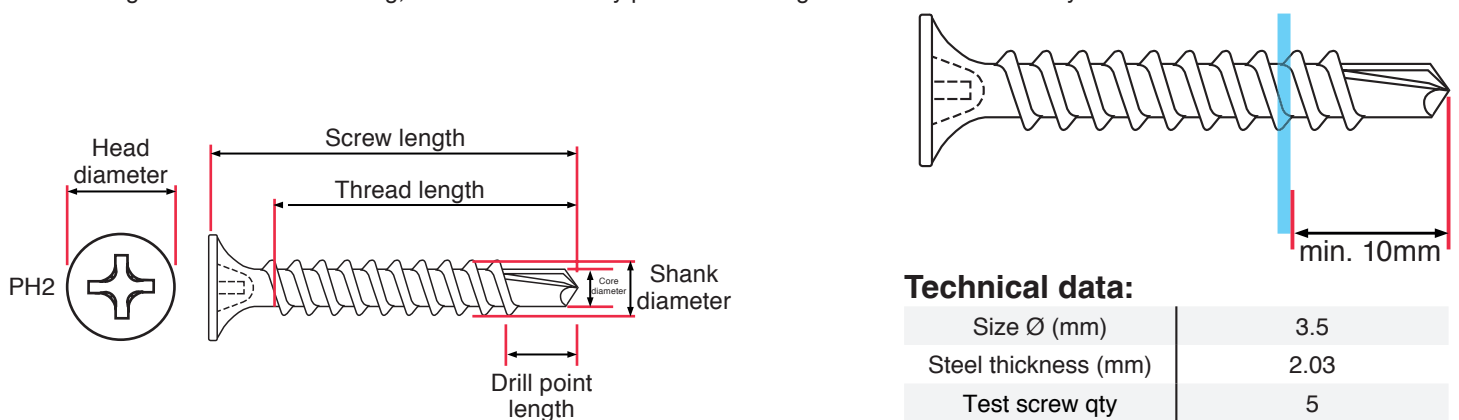

### Technical data:

|                        |      |
|------------------------|------|
| Size Ø (mm)            | 3.5  |
| Steel thickness (mm)   | 2.03 |
| Test screw qty         | 5    |
| Rec. tensile load (kN) | 6.6  |
| Max. rec load (kg)     | 116  |
| Min. torque break (kg) | 28   |